


# DL7500

# 銀箭牌

Computerized Lockstitch Sewing Machine With  
Double Stepping Motor & Touch Panel

雙步進電腦觸控平縫車

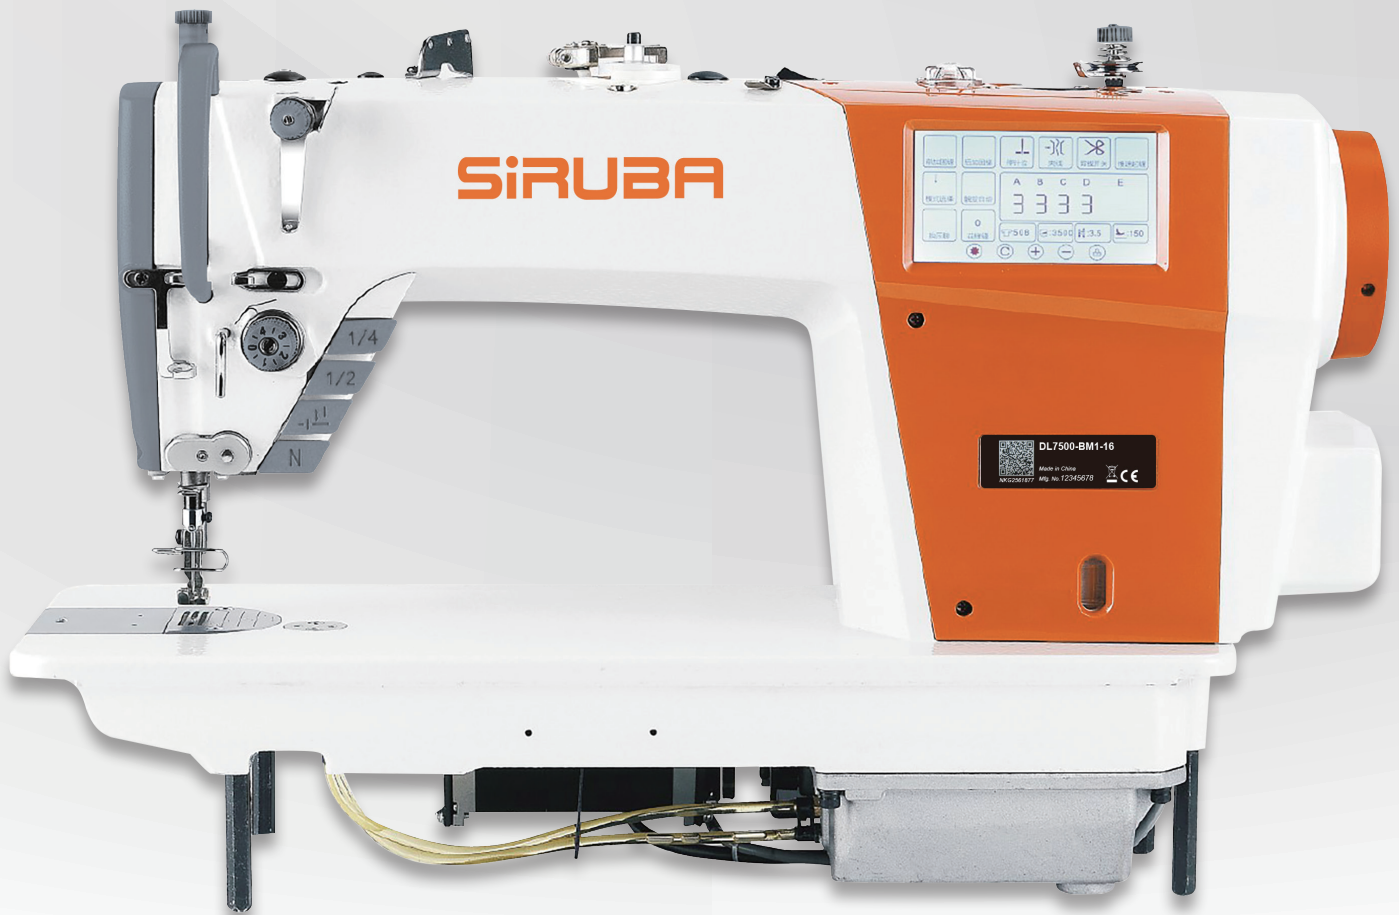

本機採用一體式智能操作系統，配備4.3寸觸摸顯示屏，簡化操作邏輯，參數調整更加便捷。無軸承主軸伺服馬達、花樣米粒縫、包油盤、電子膝控、短線頭等功能，且送布、剪線、抬壓腳為步進電機驅動，穩定低噪音，功能齊全，質量穩定。

This machine adopts an integrated intelligent operating system, equipped with a 4.3-inch touch screen, which simplifies the operation logic and makes parameter adjustment more convenient. Special features includes bearing-less spindle servo motor, pattern stitch, sealed oil tank, electronic kneepad, short thread trimmer. Feeding, thread trimming and presser foot lifting are driven by stepping motors, which is stable and quiet. Completed functions and stable quality.

 SIRUBA

# 特點

# FEATURES

全新觸控顯示屏：  
4.3英寸彩色觸摸屏，內容直觀，操作方便



Advanced touch screen:  
4.3-inch colored touch screen, intuitive and convenient.

四個按鍵：  
配有四個補針鍵，方便進行加固、補針（補1針，補1/2針，1/4針）倒縫操作。



Four buttons:  
Equipped with four stitch compensation buttons, machine is convenient for reinforcement and stitch compensation (1 stitch, 1/2 stitch, 1/4 stitch) and reverse stitching operation.


黑金鋼針桿：  
採用黑金鋼針桿，減少了頭部供油，顯著減少針桿漏油。



Needle bar made with black gold metal:  
It helps to decrease the oil consumption and to prevent the needle bar from oil leakage.

- 1 步進馬達電子針距控制技術：**  
實現倒縫與正縫針腳高度重合。  
**Stepping motor electronic stitch length control:**  
The stitch height of reverse stitching and normal stitching are aligned.
- 2 步進馬達雙向驅動技術(專利技術)：**  
一個馬達完成切線和抬壓腳動作。  
**Two-way stepping motor technology(patented):**  
One motor completes thread trimming and presser foot lifting.
- 3 短線頭：**  
採用電機驅動的雙動刀剪線機構，可在機針正下方完成剪線，縫紉後的線頭最短可達3mm，可有效減少人工剪線的工作量。  
**Short thread head:**  
The shortest thread head is down to 3mm, which can effectively reduce workload of manual trimming.

- 4 花樣縫：**  
DL7500 可以透過設定產生8種不同線跡。  
**Pattern stitch:**  
DL7500 stepping motor offers 8 different patterns.
- 5 低噪音：**  
優化的機殼設計和主軸馬達結構，機器運轉時噪音低；採用步進馬達控制加固縫，加固時無聲響；採用步進馬達控制抬壓腳，壓腳提升和下降時聲音輕柔；採用步進馬達驅動切線，切線聲音大幅度降低。  
**Low noise:**  
With optimized internal design and with stepping motor without bearing, DL7500 is quiet when reverse feeding, presser foot lifting, and trimming.
- 6 密封油盤設計：**  
避免油污造成的縫料污染，同時可減小整機運作時的噪音。  
**Oil tank design:**  
Sealed oil tank to avoid fabric from grease and to reduce noise when machine operates.

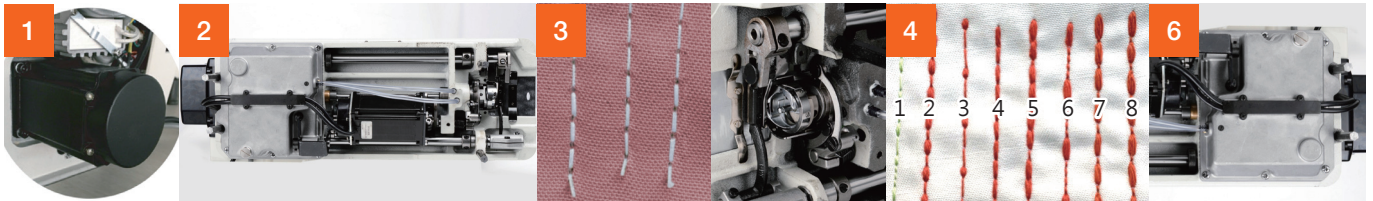

# 規格

# SPECIFICATIONS

DL7500	Needle No.	布料厚度 Fabric Weight			mm		mm	S.P.M. (Max)	mm	KG
		L	M	H	手動 Hand	自動 Auto				
M	DB×1 #9 - #16				11	11	0~5	4500	L620 W280 H550	37.4 / 43.5
H	DP×5 #18 - #21						0~7			

功能選配 Function Option	代碼Function Code	倒縫 Reverse Feeding	電子夾線 Thread Nipper	自動抬壓腳 Auto Lifter	防鳥巢 Bird nest prevention
	16	V	V	V	-
	17	V	V	V	V



由於對產品的改良及更新，本產品型錄中之產品規格及外觀的修改恕不事先通知！  
The specification and/or appearances of the equipment described in this catalogue are subject to change without previous notice because of modification.

